

BRIGHT

ID ECBRL

IP 40



5 YEARS WARRANTY

BRIGHT's body is made of a **harness holder** and a **light module that integrates LED and diffuser**.

This allows the accessories to be fixed without any position constraint, while the integration between LED and diffuser guarantees inaccessibility to the optical compartment. The electrical connection between the light module and the battens is guaranteed by quick connectors that prevent polarity inversions and false contacts, thus preserving the LED technology.

☑ Features

- Direct emission
- Direct/indirect emission
- UGR<19; <22

💡 Led

- 3000K/4000K
- >107 lm/W
- CRI>90
- Eye safety: RG0/RG1
- Mac Adams 3
- L90/B50 >50.000h

🎯 Specifications

- Built-in driver
- DPL technology for controlled emission UGR<19
- PG diffuser for homogeneous emission UGR<22
- Diffuser with ILC technology (Indirect Light Control) for partially indirect emission

📦 Body

- Aluminum with epoxy powder coating

🎨 Colors

- White RAL 9003
- Black RAL 9005

★ Certifications

- CE Conformity
- RETILAP Conformity
- ETL Conformity
- Energy efficiency C

📄 On request

- 0-10V
- 3500K



BRIGHT___DPL

Diffuser with Diamond Prism Technology UGR<19. ILC (Indirect Light Control) technology for partially indirect emission.



UGR<19

IP 40



BRIGHT___DPL DOUBLE EMISSION

Lower diffuser with Diamond Prism Technology UGR<19. ILC (Indirect Light Control) technology and upper PG protective diffuser for dual emission: direct/indirect.



UGR<19

IP 40



BRIGHT___PG

Antistatic satin methacrylate diffuser screen, UGR<22. Diffuser with ILC (Indirect Light Control) technology for partially indirect emission.



UGR<22

IP 40



BRIGHT___DI PG DOUBLE EMISSION

Lower satin methacrylate antistatic diffuser screen, UGR<22. ILC (Indirect Light Control) technology and upper PG protective diffuser for dual emission: direct/indirect.




UGR<22

IP 40




BRIGHT

PRODUCT CODE EXAMPLE



SIZE

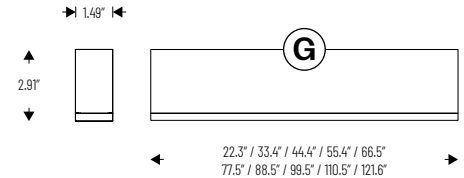

A FAMILY

ECBRL BRIGHT

F FINISH COLOR

WH - White

BK - Black

B POWER

LP - Low power (only for decrease power version indicate the power with max 2 numbers)

HP - High power (only for decrease power version indicate the power with max 2 numbers)

G LENGHTS

022 - 22.3"

033 - 33.4"

044 - 44.4" (min length of HP versions)

055 - 55.4"

066 - 66.5" (max length of the HP versions - min length of DE versions)

077 - 77.5"

088 - 88.5"

100 - 99.5"

111 - 110.5"

122 - 121.6"

C LIGHT DISTRIBUTION

DR - Direct only

DE - Double emission (available only for LP version)

D OPTICS

DP - Diamond prism led technology (UGR<19)

PG - Methacrylate satin diffuser (UGR<22)

H LED CCT

309 - 3000K CRI90

359 - 3500K CRI90 (on request)

409 - 4000K CRI90

E MOUNTING

P1 - Pendant 59.05" (with flexible cord and power box)

P3 - Pendant 59.05" (with flexible cord and power box, for continuous rows)

PI - Pendant 118.11" (with flexible cmd and power box)

P4 - Pendant 118.11" (with flexible cmd and power box, for continuous row)

SM - Surface mount (ceiling, available only for DR versions)

I WIRING

2S - 0-10V Dim

3S - ON/OFF

LUMEN PACKAGE

BRIGHT		DP		PG	
4000K		D	DI	D	DI
22.3"	LP	12W 1310lm		12W 1348lm	
33.4"	LP	18W 1966lm		18W 2022lm	
44.4"	LP	24W 2621lm	30W 3221lm	24W 2696lm	30W 3297lm
	HP			48W 5393lm	
55.4"	LP	30W 3276lm	36W 3877lm	30W 4045lm	36W 3971lm
	HP			60W 6741lm	
66.5"	LP	36W 3931lm	48W 5119lm	36W 4045lm	48W 5232lm
	HP			72W 8089lm	
77.5"	LP	42W 4586lm	54W 5774lm	42W 4719lm	54W 5906lm
88.5"	LP	48W 5242lm	72W 7617lm	48W 5393lm	72W 7768lm
99.5"	LP	54W 5897lm	78W 8272lm	54W 6067lm	78W 8442lm
110.5"	LP	60W 6552lm	84W 8927lm	60W 6741lm	84W 9116lm
121.6"	LP	66W 7207lm	90W 9582lm	66W 7415lm	90W 9790lm

ACCESSORIES

ECBRL BMxxxP2-Blind Module - xxx is for indicate the lenght - Pendant 59.05" (with out flexible cord and canopy, for continuos row)

ECBRL BMxxxP4-Blind Module - xxx is for indicate the lenght - Pendant 118.11" (with out flexible cord and canopy, for continuos row)

ECBRL BMxxxSM-Blind Module - xxx is for indicate the lenght - Surface mount (ceiling)

ECBRL 2LINJ-twoways linear joint

ECBRL 2xxxJ-two ways joint - xxx is for indicate the angle

ECBRL 3xxx-xxxJ-three ways joint - xxx is for indicate the angle

FINISH ACCESSORIES (xx):

WH-White

BK-Black



Electrified linear joint.



2 ways electrified joint
(dim: 2.36"x2.36").



3 ways electrified joint
(dim: 2.36"x32.13").



Blind connection module
in aluminium. Linear
mechanical joints included.
Other lengths on request.
Electrified linear joint
4 ways.