

# GHOSTFEED 2.0

ID ECGF2

IP 40



ETLus  
READY



5 YEARS WARRANTY

**GHOSTFEED 2.0** is the new **single-cable system** that, with a minimal installation impact, is able to create continuous **lines of light extending up to fifteen meters**. The special tensioners require only two anchoring points, thus finding space even in those architectural solutions where the presence of the light source must be particularly discreet. **The low voltage system of GHOSTFEED 2.0** allows the installation of **LED strips for direct and indirect light**; further versatility is conferred by accessories such as **diffusing optics, blind modules** and adjustable **micro-spots for accent lighting**.

## ☑ Features

- Direct/indirect emission
- UGR<22
- IP 40

## 💡 Led

- 2700K/3000K/4000K
- CRI>90
- Eye safety: RG0/RG1
- Mac Adams 3
- L90/B50 >50.000h

## 🔗 Specifications

- Remote driver
- Diffuser in satin methacrylate for direct/indirect emission

## 📏 Body

- Steel sheet with epoxy powders coating

## 🎨 Colors


- White wrinkled matte RAL 9003 - code W
- Black RAL 9005 matte - code BK

## ☆ Certifications

- CE Conformity
- BIS Conformity
- RETILAP Conformity
- Energy efficiency E

## ⊕ On request


- 0-10V
- 3500K

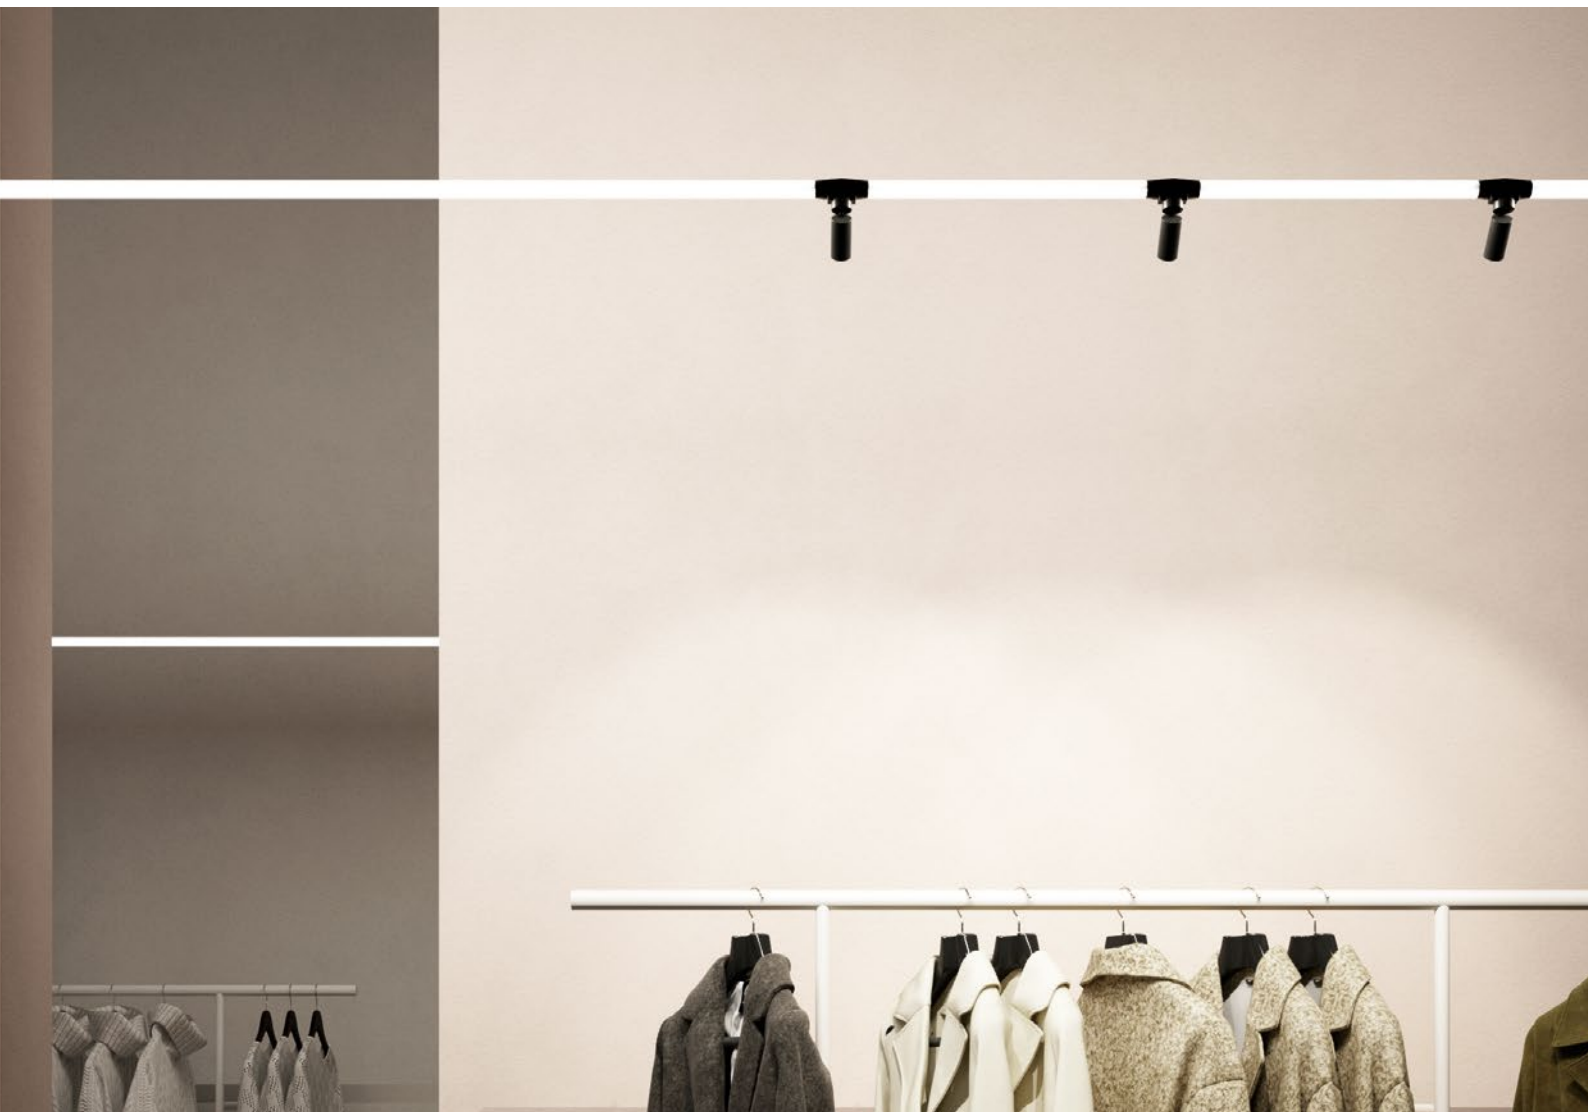



## GHOSTFEED\_\_\_2.0

Kit of two die-cast aluminum wall tensioners and metal support strip.

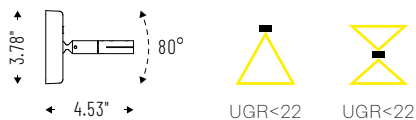

Cod.	in
ECGF2KT5M	196.85"
ECGF2KT10M	393.70"



## GHOSTFEED\_\_\_STRIP

Adhesive LED strip 24V CRI>90, 10W/ In.  
Length 196.85", sectionable every 0.98".

Cod. 4000K	Led	lm/in	in
ECGF2ST40924V10	10W	940	196.85"

Cod. 3000K	Led	lm/in	in
ECGF2ST30924V10	10W	813	196.85"


IP 20

Cod. 2700K	Led	lm/in	in
ECGF2ST27924V10	10W	760	196.85"



## GHOSTFEED\_\_\_SPOT ZOOM

Micro spot with adjustable beam from 10° to 40°  
including attack for Ghostfeed 2.0.

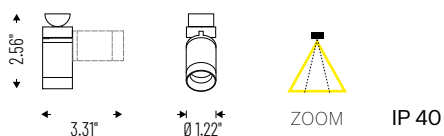

Cod. 4000K	Led	lm
ECGF2SZ40924V3	3W	262

Cod. 3000K	Led	lm
ECGF2SZ30924V3	3W	238

Cod. 2700K	Led	lm
ECGF2SZ27948V3	3W	221



# ACCESSORIES



PG satin diffuser,  
for direct/indirect light.

**ECGF2SCPG1000** - L 39.37"  
**ECGF2SCPG2000** - L 78.74"  
**ECGF2SCPG3000** - L 118.11"



Blind module.

**ECGF2SCMC1000** - L 39.37"  
**ECGF2SCMC2000** - L 78.74"  
**ECGF2SCMC3000** - L 118.11"



Quick connector for  
strip-cable connection.

**ECGF2CRSC**



Quick connector for  
strip-strip connection.

**ECGF2CRSS**



Slim driver 24V - for remote  
installation.



Driver cover.

**ECGF2DC24V60W**  
**ECGF2DC24V100W**

# TECHNICAL NOTES

## CONFIGURATION EXAMPLE

Maximum length of the metal band: 590.55". Two-point wall anchoring. 40° of maximum inclination towards the wall mount.

