

PIPE LINE

ID ECPIM/ECPIL IP 40



5 YEARS WARRANTY

Stylish and extremely minimal design combined with high performance make **PIPE LINE** a direct emission suspension suitable for illuminating any setting: office, retail, or residential environments. The remote driver makes installation extremely flexible. The **PG optics**, providing uniform emission, enable the illumination of spaces with diffuse light, while the **High Contrast microcell optics** with superior glare control (**UGR<16**) is the perfect solution for desks and workstations.

☑ Features

- Direct/indirect emission
- Direct emission
- UGR<16; <22

💡 Led

- 3000K/4000K
- >132 lm/W
- CRI>90
- Eye safety: RG0/RG1
- Mac Adams 3
- L90/B50 >50.000h

🕒 Specifications

- PG: satin methacrylate diffuser for homogeneous emission UGR<22
- HC: diffuser with UGR<16 microcells
- PG-HC: a combination of homogeneous emission and High Contrast
- DK: diffuser with UGR<16 microcells

📦 Body

- Aluminum with epoxy powder coating

🎨 Colors

- White RAL 9003 wrinkled
~ code W
- Black RAL 9005 wrinkled
~ code BK

☆ Certifications

- CE Conformity
- RETILAP Conformity
- ETL Conformity
- Energy efficiency D

📦 On request

- 0-10V
- 3500K



PIPE LINE MONO PG

Methacrylate satin diffuser for soft diffusion,
UGR<22.



UGR<22

IP 40



PIPE LINE MONO DK

High Contrast diffuser UGR<16.




UGR<16

IP 40




PIPE LINE MONO

PRODUCT CODE EXAMPLE



SIZE



A FAMILY

ECPIM PIPE LINE MONO

B POWER

ST - Standard power

DP - Decrease power (only for DP, DP followed by up two numbers for indicate the power)

C OPTICS

PG - Methacrylatee satin diffuser

DK- Microcells high contrast diffuser

D MOUNTING

P1 - Pendant 59.05" (with flexible cord and power box)

P3 - Pendant 118.11" (with flexible cord and power box)

SM - Surface mount (ceiling)

E FINISH COLOR

WH - White

BK - Black

F LENGHTS

057 - 57"

071 - 71.2"

085 - 85.4"

100 - 99.5"

114 - 113.7"

H LED CCT

309 - 3000K CRI90

359 - 3500K CRI90 (on request)

409 - 4000K CRI90

L WIRING

2S - 0-10V

3S - ON/OFF

LUMEN PACKAGE

PIPE LINE		PG	DK
4000K		D	D
57"	LP	31W 4092lm	31W 3575lm
71"	LP	39W 5148lm	39W 4497lm
85.4"	LP	46W 6072lm	46W 5305lm
99.5"	LP	54W 7128lm	54W 6227lm
113.7"	LP	62W 8184lm	62W 7150lm

PIPE LINE_DUO




PIPE LINE DUO____PG

Methacrylate satin diffuser for soft diffusion,
UGR<22.



UGR<22

IP 40




PIPE LINE DUO____DK

Microcells High Contrast diffuser, UGR<16.



UGR<22

IP 40



PIPE LINE DUO____PG-DK

Combination between soft homogeneous
emission and High Contrast microcells accents.




UGR<22

IP 40




PIPE LINE DUO

PRODUCT CODE EXAMPLE



SIZE

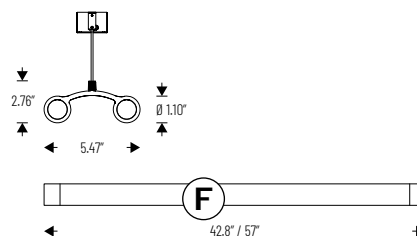

(A) FAMILY

ECPIL PIPE LINE DUO

(B) POWER

ST - Standard power

DP - Decrease power (only for DP, DP followed by up two numbers for indicate the power)

(E) FINISH COLOR

WH - White

BK - Black

(F) LENGHTS

043 - 42.8"

057 - 57"

(C) OPTICS

PG - Methacrylate satin diffuser

DK- Microcells high contrast diffuser

PD - Combination between sot homogeneous emission and high contrast microcells accents

(G) LED CCT

309 - 3000K CRI90

359 - 3500K CRI90 (on request)

409 - 4000K CRI90

(D) MOUNTING

P1 - Pendant 59.05" (with flexible cord and power box)

P3 - Pendant 118.11" (with flexible cord and power box)

SM - Surface mount (ceiling)

(H) WIRING

2S - 0-10V

3S - ON/OFF

LUMEN PACKAGE

PIPE LINE DUO		PG	DK	PD
4000K		Adjustable emission	Adjustable emission	Adjustable emission
42.8"	LP	48W 6254lm	48W 5538lm	48W 5946lm
57"	LP	62W 8184lm	62W 7149lm	62W 7667lm