

# TERES PRO

ID ECTRP

IP 40



ETLus  
READY

5 YEARS WARRANTY

With a distinctly **architectural vocation**, **TERES PRO** represents the latest and most **sophisticated inspiration for spotlight with a compact and slim body** equipped with a driver completely hidden into the track. The **TERES PRO ZOOM** version thanks to the **adjustable light beam** is the best solution when flexibility is required to enlighten spaces and objects modifying the accent light to wide beam by a simple touch. **The PRO ART version** responds to the demanding lighting **requirements of museum and exhibition spaces**: the gobos allow you to design clearly and precisely geometrical rays lights, perfect to enhance sculptures and paintings.

## ☑ Features

- Direct emission
- UGR<19

## 💡 Led

- 3000K/4000K
- >113 lm/W
- CRI>90/CRI>95
- Eye safety: RG0/RG1
- Mac Adams 3
- L90/B50 >50.000h

## ☑ Specifications

- In track driver
- CoB LED technology
- PC lens 15°-24°-36°-50°
- ZOOM lens from 10° to 45°

## ☐ Body

- Die-cast aluminum with epoxy powder coating

## 🎨 Colors


- White RAL 9003 wrinkled - code W
- Black RAL 9005 wrinkled - code BK

## ☆ Certifications

- CE Conformity
- ETL Certification
- Energy efficiency E

## 📦 On request

- 3500K

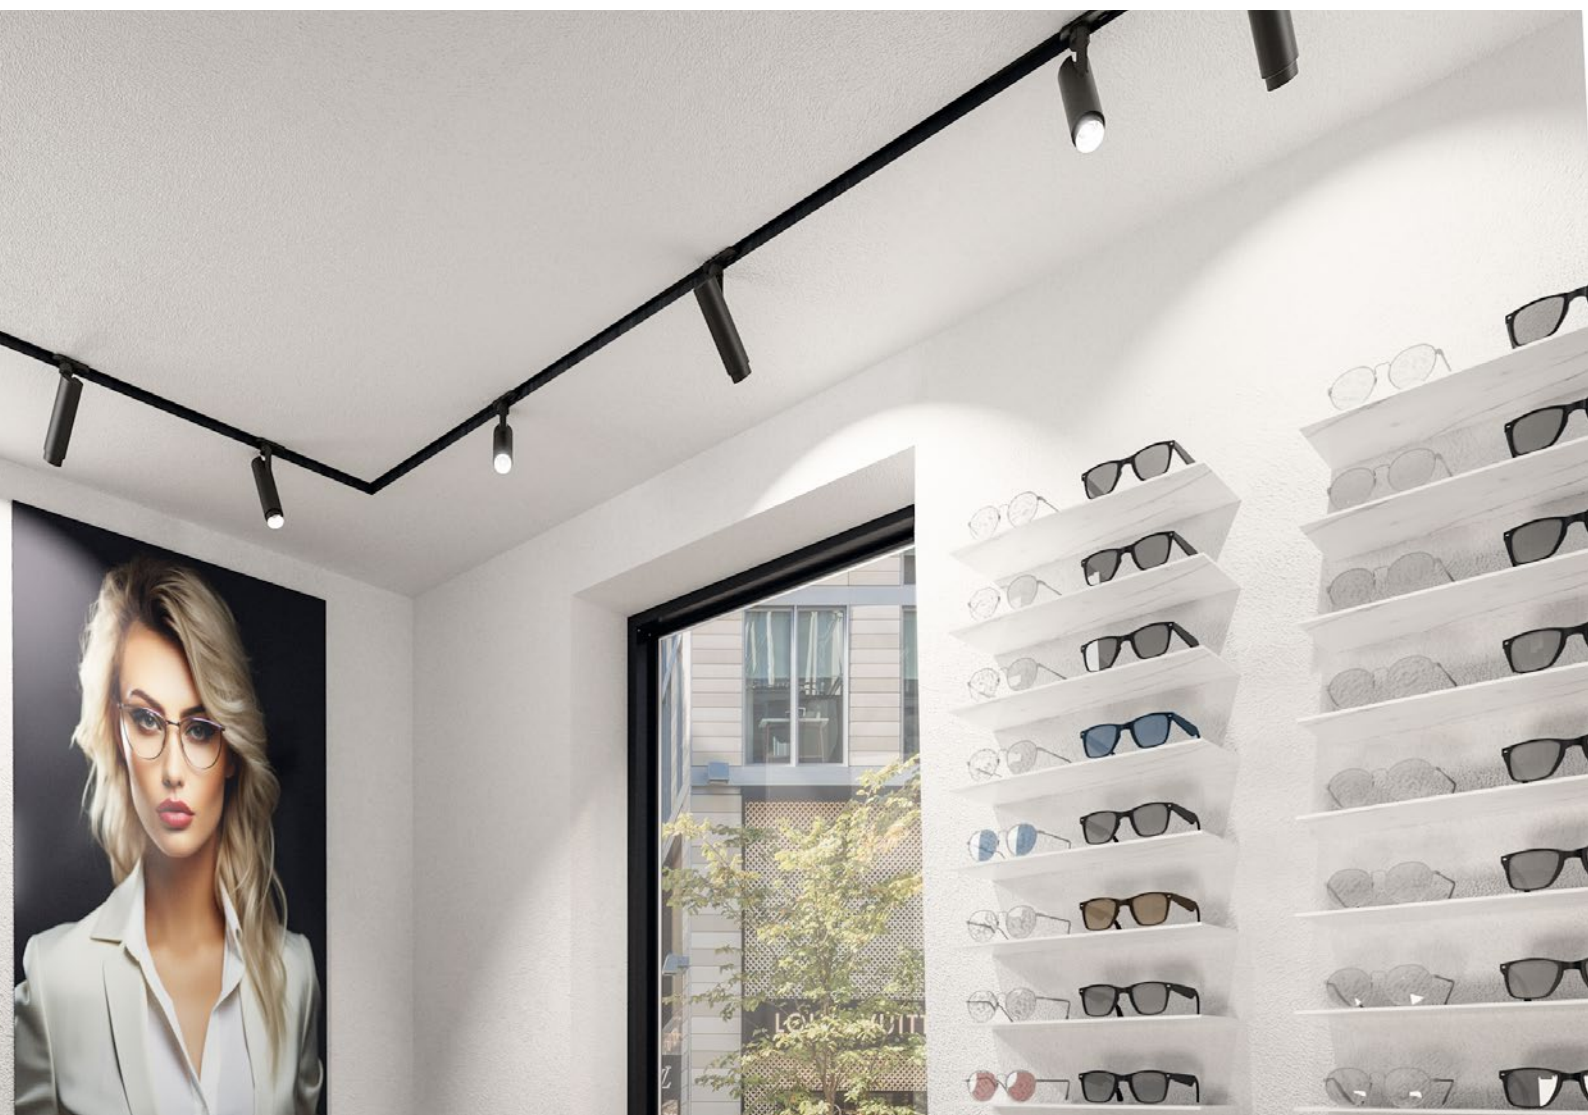

# TERES PRO PC

PC lens 15°-24°-36°-50°.



# TERES PRO ZOOM

PC adjustable lens 10°-45°.






# TERES PRO ART

PC lens adjustable 25°-36° with flaps, CRI>95.




## TECHNICAL NOTES

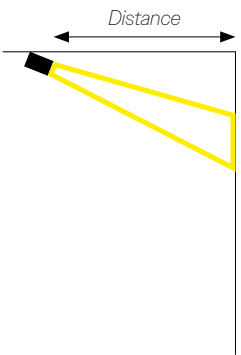For a better application of **TERES PRO ART**, table below, we indicate the suggested diameter or area of the gobos considering the different lens and distance from spot light and masterpiece to be illuminated.

	Shape	Distance			
		39.37"	78.74"	118.11"	157.48"
	25°	Ø 1.46"	Ø 3.15"	Ø 4.88"	Ø 6.61"
	36°	Ø 2.36"	Ø 4.72"	Ø 7.28"	Ø 9.96"
	25°	□ 1.02"x1.02"	□ 2.24"x2.24"	□ 3.46"x3.46"	□ 4.67"x4.67"
	36°	□ 1.65"x1.65"	□ 3.39"x3.39"	□ 5.16"x5.16"	□ 7.05"x7.05"

# TERES PRO

## PRODUCT CODE EXAMPLE



### A FAMILY

ECTRP TERES PRO

### B POWER

MP - Medium power (15W)

HP - High power (21W)

DP - Decrease power (only for DP, DP followed by up two numbers for indicate the power)

### C OPTICS

PC - Polycarbonate lens (PC version)

ZM - Polycarbonate adjustable lens 10°-45°  
(ZOOM version)

BG - Polycarbonate adjustable lens 25°-36°  
with flaps (ART version)

### D BEAM ANGLE

15 - 15° beam angle (only for PC version)

24 - 24° beam angle (only for PC version)

36 - 36° beam angle (only for PC version)


50 - 50° beam angle (only for PC version)

### E FINISH COLOR


WH- White

BK- Black


### PC SIZE



### ZOOM SIZE



### ART SIZE



### F LED CCT

309 - 3000K CRI90

359 - 3500K CRI90 (on request)

409 - 4000K CRI90

### G WIRING

3S - ON/OFF

## ACCESSORIES

ECTRP-RF-X - External ring

A - Chromed

G - Gold

W - White

BK - Black

ECTRP-BR - Barndoors 4 fold

ECTIRP-ND - Honey comb




External ring.



Barndoors.




Honey comb.

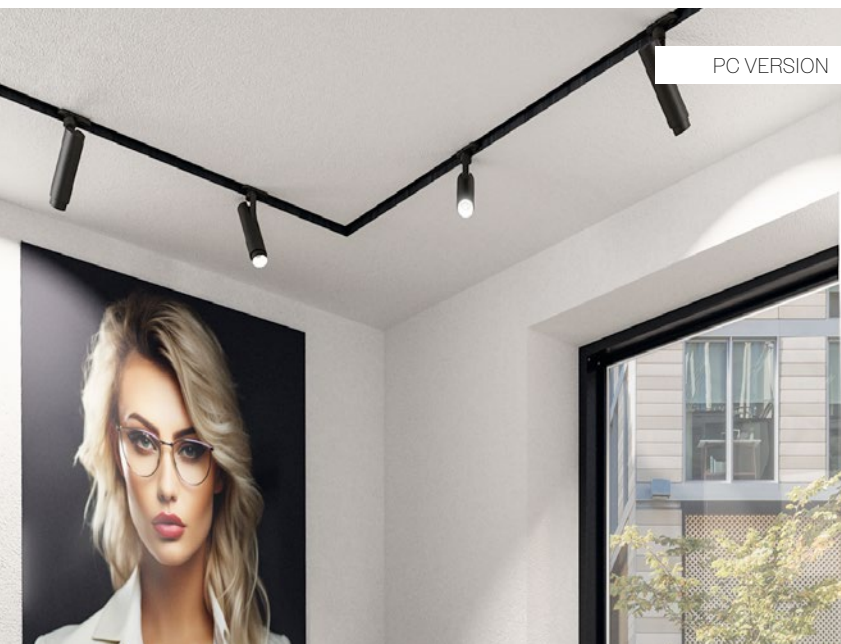

PC VERSION

## PC VERSION LUMEN PACKAGE


TERES PRO		
4000K		VT
1.97×6.5"	LP	15W 1695lm
	HP	21W 2373lm

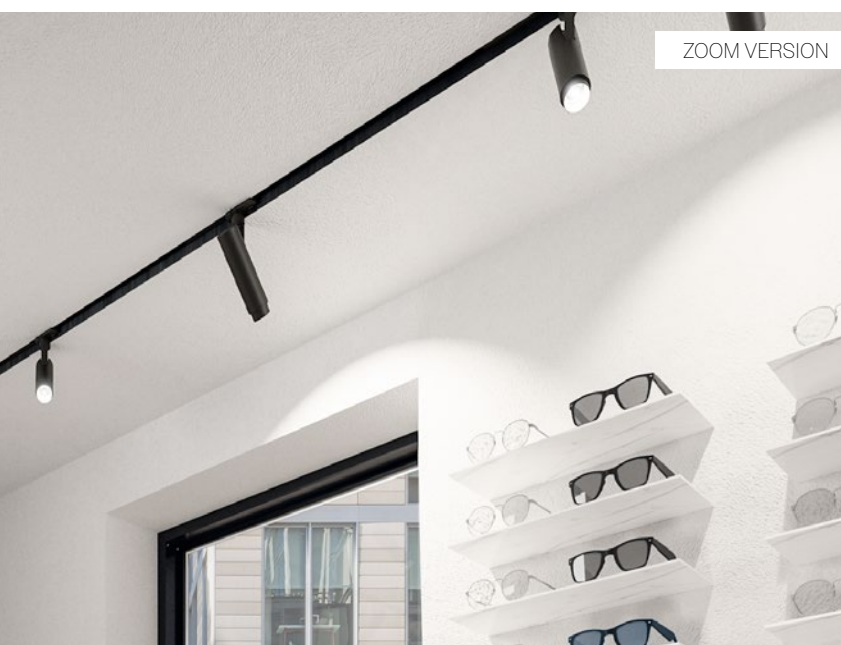

ZOOM VERSION

## ZOOM VERSION LUMEN PACKAGE

TERES PRO		
4000K		ZOOM
1.97×7.32"	LP	15W 1653lm
	HP	21W 2295lm

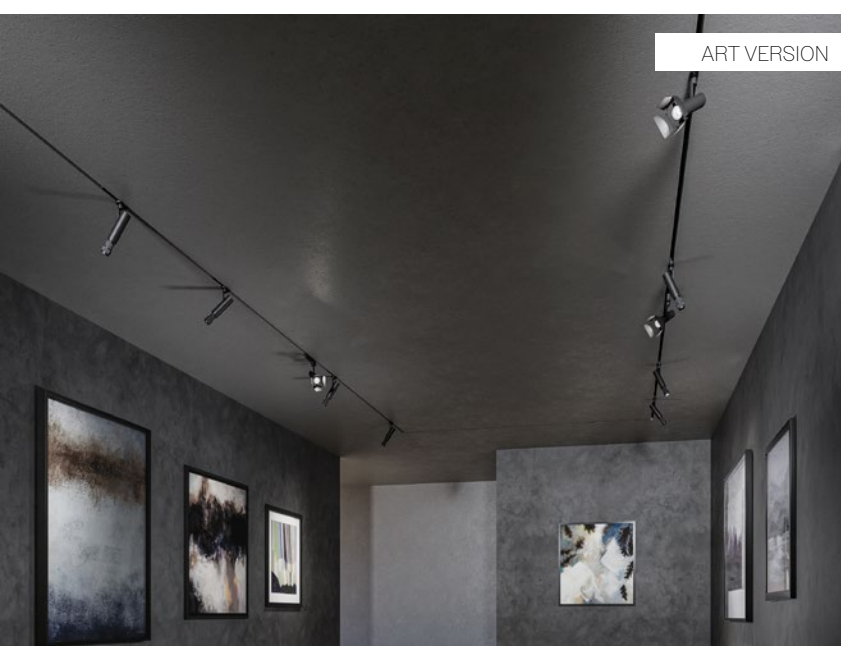

ART VERSION

## ART VERSION LUMEN PACKAGE

TERES PRO		
4000K		GB
1.97×8.9"	LP	15W 1635lm
	HP	21W 2297lm